

108cells Monocrystalline Bifacial
Dual Glass Module



HRAP-108HBD
395-420M10

21.51%

Maximum Module Efficiency

420W

Maximum Power Output

Power Shorting Tolerance:0-3W

1722×1134×30mm

Module Dimensions

IEC 61215 / IEC 61730

Fire safty class:Class C according to UL790


ISO 9001 :Quality Management System

ISO 14001 :Environment Management



Industry Leading Linear Power Warranty

12-year Warranty for Materials and Processing .30-year Warranty for Extra Linear Power Output

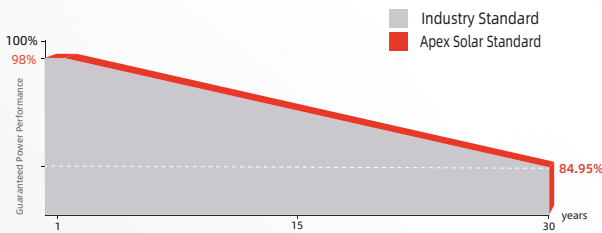

12 YEARS Process Warranty

30 YEARS Power Warranty

High Efficiency Half-cells Solar Panel HRAP-108HBD 395-420M10

ELECTRICAL PARAMETERS AT STC

Rated Maximum Power(Pmax) [W]	395	400	405	410	415	420
Maximum Power Voltage(Vmp) [V]	30.84	31.02	31.23	31.45	31.64	31.82
Maximum Power Current(Impp) [A]	12.81	12.90	12.97	13.04	13.12	13.20
Open Circuit Voltage(Voc) [V]	36.98	37.07	37.19	37.32	37.45	37.58
Short Circuit Current(Isc) [A]	13.70	13.79	13.87	13.95	14.02	14.10
Module Efficiency [%]	20.23	20.48	20.74	21.00	21.25	21.51

STC: Irradiance 1000 W/m2 module temperature 25°C AM=1.5

ELECTRICAL PARAMETERS AT NMOT

Rated Maximum Power(Pmax)[W]	298	302	306	310	314	318
Maximum Power Voltage(Vmp) [V]	34.75	34.88	35.12	35.23	35.37	35.50
Maximum Power Current(Impp) [A]	29.08	29.26	29.47	29.72	29.89	30.09
Open Circuit Voltage(Voc) [V]	10.96	11.03	11.10	11.16	11.22	11.29
Short Circuit Current(Isc) [A]	10.25	10.32	10.38	10.43	10.50	10.57

NMOT: Irradiance 800 W/m2 ambient temperature 20°C wind speed: 1m/s

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	Maximum Power (Pmax) [W]	415	420	425	431	436	441
	Module Efficiency STC[%]	21.24	21.51	21.78	22.05	22.31	22.58
10%	Maximum Power (Pmax) [W]	435	440	446	451	457	462
	Module Efficiency STC[%]	22.25	22.53	22.81	23.10	23.38	23.66
20%	Maximum Power (Pmax) [W]	474	480	486	492	498	504
	Module Efficiency STC[%]	24.27	24.58	24.89	25.20	25.50	25.81

MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	182×182mm
Cell Arrangement	108(6×18)
Weight	21.5kg(±3%)
Module Dimensions	1722×1134×30mm
Cable	4.0 mm² positive/negative:300mm(11.8inches),length Can be customized
Front Glass	2.0 mm (0.08 inches), High Transmission, ARCoated Heat Strengthened Glass
Back Glass	2.0 mm (0.08 inches), Heat Strengthened Glass (White Grid Glass)
Frame	Anodized aluminium alloy
Junction Box	Protection class IP68
Connector	Mc4 Compatible
Mechanical Load	Front side 5400Pa/Rear side 2400Pa



OPERATING CONDITIONS

Maximum System Voltage (V)	1000/1500VDC (IEC)
Pmax Temperature Coefficient	-0.34%/°C
Voc Temperature Coefficient	-0.28%/°C
ISC Temperature Coefficient	+0.05%/°C
Nominal Operating Cell Temperature	45±2°C
Operating Temperature	- 40°C-+85°C
Maximum Series Fuse	25A


PPACKING CONFIGURATION

Quantity/Pallet	36pcs/pallet
Quantity/Container	962pcs/40HQ


Module Dimension(mm)

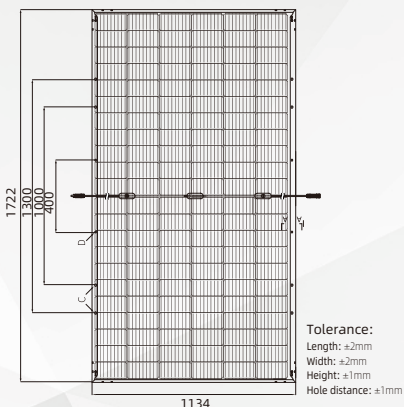

Current-Voltage Curve (420W)



Power-Voltage Curve (420W)



0-3W

0-3W%

Guaranteed 0-3W positive tolerance ensures the power output reliability



High customer value

Lower cost per kilowatt hour.High quality silicon wafer guarantee, high power module output, excellent cost performance advantage, is an ideal choice for solar power stations



Highly reliable due to stringent quality control

Three times strict EL testing beyond certification requirements



Fusion of MBB and half-cut cells technology

The new circuit design, minimizes the impact of shadow on the power generation of solar module.Excellent light utilization and current collection capacity, effectively improve product power output and reliability



Excellent Anti-PID performance

Ensure that the scale production passes the PID test, and greatly reduce the attenuation caused by PID by optimizing the wafer process



Outstanding low light performance

The coated glass with high transmittance and the surface technology of the wafer are used to achieve excellent performance in low light environment