

# HRAP-144H 565-585M10

## N-TOPCon Technology

### 22.65%

Maximum Module Efficiency

### 585W

Maximum Power Output

Power Shorting Tolerance:0~+3W

### 2278×1134×35mm


Module Dimensions

IEC 61215 / IEC 61730  
Fire safety class: Class C according to UL790  
ISO 9001 :Quality Management System  
ISO 14001 :Environment Management



### Industry Leading Linear Power Warranty

12-year Warranty for Materials and Processing .30-year Warranty for Extra Linear Power Output

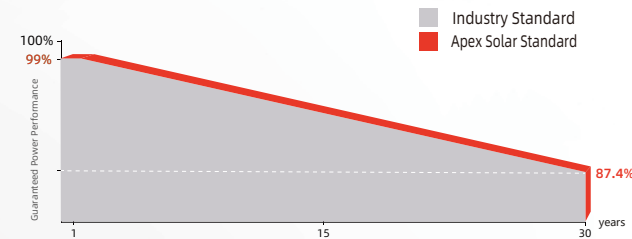

**12 YEARS** Process Warranty      **30 YEARS** Power Warranty

### ELECTRICAL PARAMETERS AT STC

Rated Maximum Power(Pmax) [W]	565	570	575	580	585
Maximum Power Voltage(Vmp) [V]	41.92	42.07	42.22	42.37	42.52
Maximum Power Current(Imp) [A]	13.48	13.55	13.62	13.69	13.76
Open Circuit Voltage(Voc) [V]	50.60	50.74	50.88	51.02	51.16
Short Circuit Current(Isc) [A]	14.23	14.31	14.39	14.47	14.55
Module Efficiency [%]	21.87	22.07	22.26	22.45	22.65

STC: Irradiance 1000 W/m<sup>2</sup> module temperature 25°C AM=1.5

### ELECTRICAL PARAMETERS AT NMOT

Rated Maximum Power(Pmax)[W]	425	429	432	436	440
Maximum Power Voltage(Vmp) [V]	39.38	39.51	39.60	39.69	39.81
Maximum Power Current(Imp) [A]	10.79	10.85	10.92	10.99	11.05
Open Circuit Voltage(Voc) [V]	48.06	48.20	48.33	48.46	48.60
Short Circuit Current(Isc) [A]	11.49	11.55	11.62	11.68	11.75

NMOT: Irradiance 800 W/m<sup>2</sup> ambient temperature 20°C wind speed: 1m/s

### MECHANICAL SPECIFICATION

Cell Type	N-Type Monocrystalline
Cell Dimensions	182×182mm
Cell Arrangement	144(2×72)
Weight	28kg(±3%)
Module Dimensions	2278×1134×35mm
Cable	4.0 mm <sup>2</sup> positive/negative:300mm(11.8inches ),length Can be customized
Front Glass	3.2 mm high transmittance,AR coating tempered glass
Frame	Anodized aluminium alloy
Junction Box	Protection class Ip68
Type of Connector	PV-XT101.1 ( Suzhou Xtong Photovoltage Technology Co., Ltd)
Mechanical Load	Front side 5400Pa/Rear side 2400Pa



### OPERATING CONDITIONS

Maximum System Voltage (V)	1000/1500VDC (IEC)
Pmax Temperature Coefficient	-0.30%/°C
Voc Temperature Coefficient	-0.25%/°C
ISC Temperature Coefficient	0.046%/°C
Nominal Operating Cell Temperature	45±2°C
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	25A


### PPACKING CONFIGURATION

Quantity/Pallet	31pcs/pallet
Quantity/Container	620pcs/40HQ

### Module Dimension(mm)

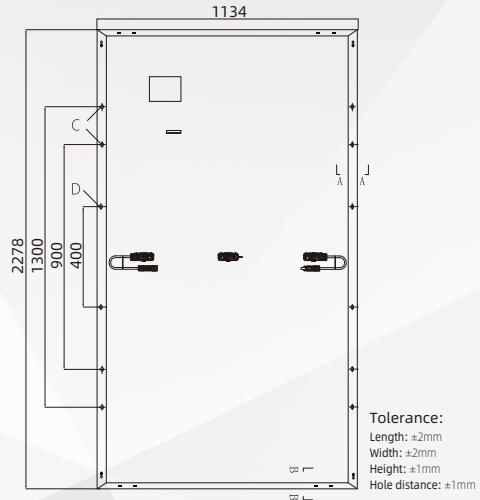

### Current-Voltage Curve (585W)

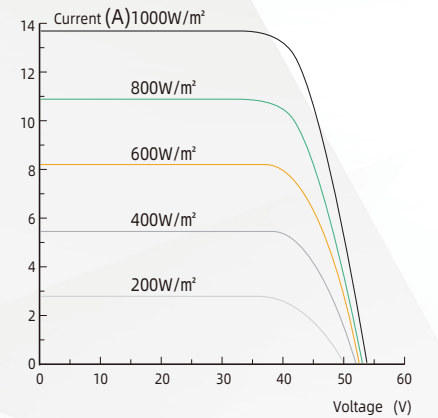

### Power-Voltage Curve (585W)

